


IN. S.P.C. E ZONE, NAD 83
NAME: 17052206
N: 517098.8250(m)
E: 76790.5910(m)

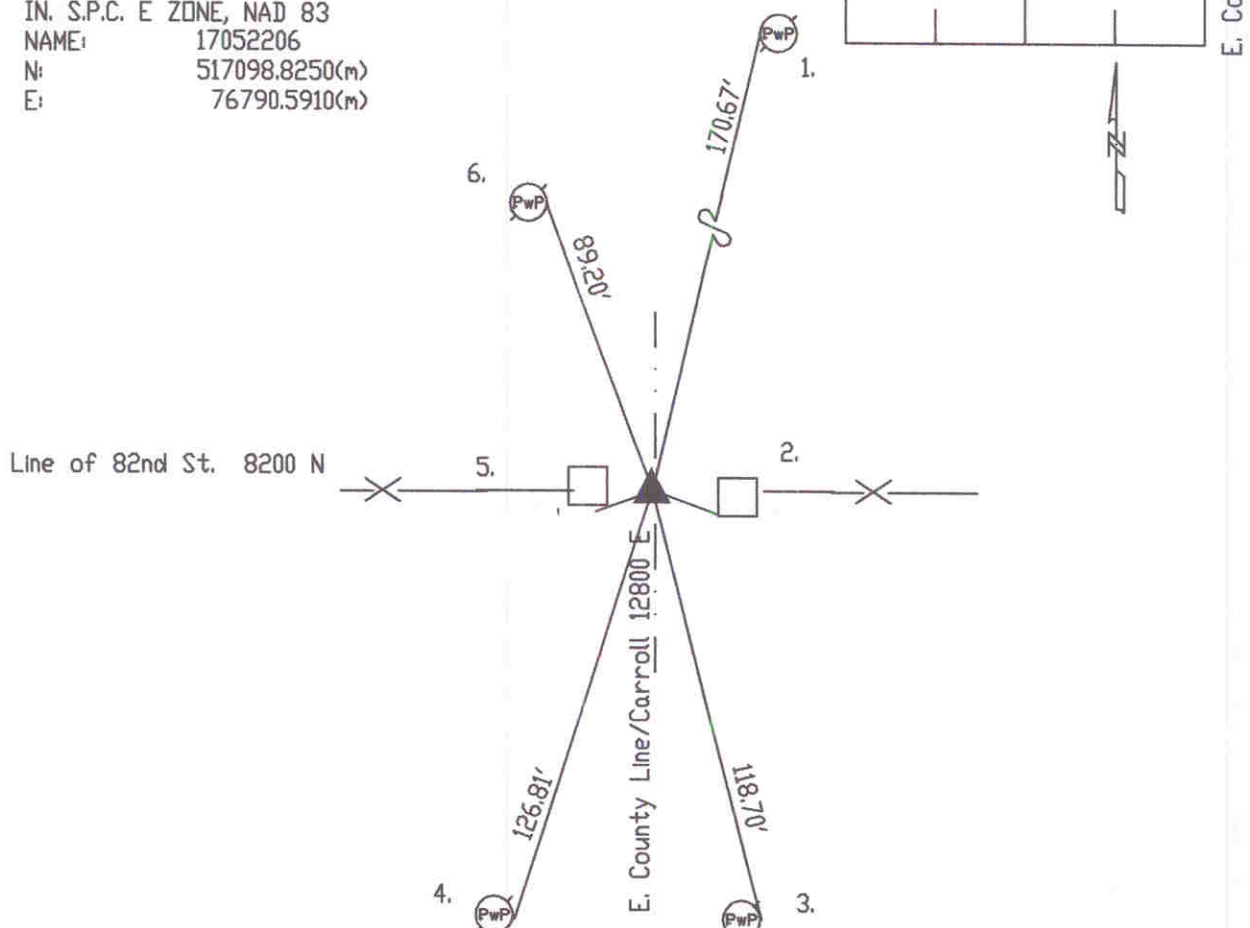

Original post set 1821 by Laughlin with witnesses: 23" beech S 34 E 15 links per Marion County Atlas pg. 16. 6-1869 Voorhis called original witness still standing per Lawrence Township Legal Survey Book pg. 11. Distance was given to the N Q Q & SE Q. 10-31-1943 tie card Hearne gave ties to corner. Did not identify type of marker; but called it 3" down. '43 ties called "checked 8-22-63. McLand 5-22-70 called stone 3" down. Murphy (Cripe Co.) 5-23-74 called the same. PK nail set over stone. Angle and distance info to corner W, N & S given on plat. 5-23-77 Hancock County called brass plug & plate over stone. Wilcoxon took new ties 6-25-82 to brass plug & plate. Re-tied 5-12-89. Re-tied 10-12-94 by Wilcoxon. Re-tied 10-6-99 by Kiste.

SC752206

REF.	DISTANCE	DESCRIPTION
1.	170.67'	PK nail W telephone pole no# 12'up
2.	16.99'	SW corner of fence post
3.	118.70'	PK nail E telephone pole no # 15'up
4.	126.81'	Mag nail w/washer E PwP#14-251HA 4'up
5.	15.25'	PK nail S corner fence post 8'up
6.	89.20'	PK nail E PwP#25-221B 12'up